

6" submersible pump AP (50-75-120-170-230 GPM)



PUMP ONLY					
H.P.	GPM	St.	Part number	Model	
5	50	6	547-0900	46 AP-50-50	
	50	6	547-0910	66 AP-50-50	
	75	4	547-0920	46 AP-75-50	
	75	4	547-0930	66 AP-75-50	
7½	50	10	547-0940	46 AP-50-75	
	50	10	547-0950	66 AP-50-75	
	75	6	547-0960	46 AP-75-75	
	75	6	547-0970	66 AP-75-75	
	120	3	547-1010	46 AP-120-75	
	120	3	547-1050	66 AP-120-75	
	170	2	547-1090	46 AP-170-75	
	170	2	547-1130	66 AP-170-75	
10	50	10	547-1140	66 AP-50-100	
	75	8	547-1150	66 AP-75-100	
	120	5	547-1170	66 AP-120-100	
	170	3	547-1210	66 AP-170-100	
	230	3	547-1250	66 AP-230-100	
15	50	16	547-1260	66 AP-50-150	
	75	12	547-1270	66 AP-75-150	
	120	7	547-1290	66 AP-120-150	
	170	5	547-1320	66 AP-170-150	
	230	4	547-1370	66 AP-230-150	
20	75	16	547-1390	66 AP-75-200	
	120	10	547-1410	66 AP-120-200	
	170	7	547-1450	66 AP-170-200	
	230	6	547-1490	66 AP-230-200	
25	75	20	547-1510	66 AP-75-250	
	120	12	547-1530	66 AP-120-250	
	170	8	547-1570	66 AP-170-250	
	230	7	547-1610	66 AP-230-250	
30	120	15	547-1650	66 AP-120-300	
	170	10	547-1690	66 AP-170-300	
	230	9	547-1730	66 AP-230-300	
40	230	12	547-1840	66 AP-230-400	

4" MOTOR				
Part number	H.P.	Volts	Phase	
153-0450	5	230	3	
153-0460	5	575	3	
153-0470	7.5	230	3	
153-0480	7.5	575	3	


6" MOTOR				
Part number	H.P.	Volts	Phase	
153-0800	5	230	1	
153-0810	5	230	1	
153-0820	5	230	3	
153-0840	5	575	3	
153-0860	7,5	230	1	
153-0870	7.5	230	3	
153-0880	7.5	575	3	
153-0890	10	230	1	
153-0900	10	230	3	
153-0920	10	575	3	
153-0930	15	230	3	
153-0940	15	575	3	
153-0950	20	230	3	
153-0960	20	575	3	
153-0970	25	230	3	
153-0980	25	575	3	
153-0990	30	330	3	
153-1000	30	575	3	
153-1010	40	230	3	
153-1020	40	575	3	

CHARACTERISTICS

- Impellers and diffusers made of Noryl
- Pump shaft and shell made of 304 stainless steel
- Internal check valve included
- Discharge = 3"
- Maximum starts in an hour = 15



EXAMPLE OF MODEL NUMBER

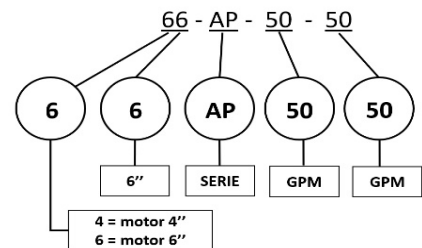

* Available (200, 230, 380, 460V - 3 phase) on request